

Psych 156A/ Ling 150: Psychology of Language Learning

Lecture 11 Poverty of the Stimulus II

Announcements

Pick up your previous homeworks if you haven't already done so (HW1 & HW2)

Be working on HW3

Look over the review questions

Poverty of the Stimulus leads to Innate Knowledge about Language: Summary of Logic

- 1) Suppose there is some *data*.
- 2) Suppose there is an *incorrect hypothesis compatible with the data*.
- 3) Suppose children behave as if they *never entertain the incorrect hypothesis*.


Conclusion: Children possess prior (innate) knowledge ruling out the incorrect hypothesis from the hypotheses they do actually consider.

Hypothesis = Generalization About Items in the Language

- 1) Suppose there is some *data*.
- 2) Suppose there is are *multiple generalizations* compatible with the data.
- 3) Suppose children behave as if they *never make incorrect generalizations*.

Conclusion: Children possess prior (innate) knowledge biasing them away from the incorrect generalizations.

Making generalizations that are underdetermined by the data

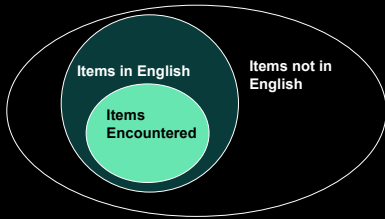


Children encounter a subset of the language's data, and have to decide how to generalize from that data

Poverty of the stimulus: data alone cannot pinpoint the correct generalization.


Making generalizations that are underdetermined by the data

Here's a question: is there any way to check what kinds of generalizations children prefer to make?

Example: Suppose they're given a data set that is compatible with two generalizations: a less-general one and a more-general one.

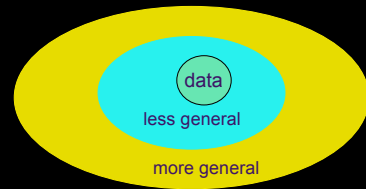

Choosing generalizations

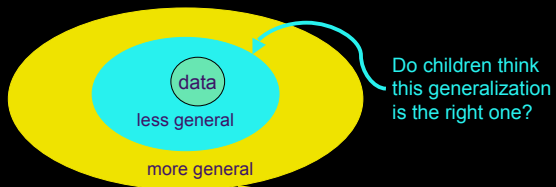


Do children think this generalization is the right one?

Or do children think this generalization is the right one?

How can we tell?

Generalization = predictions about what data are in the language

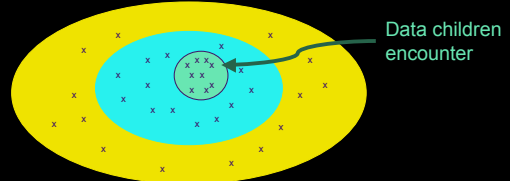

Choosing generalizations: the less general hypothesis

If children think the less-general hypothesis is correct, they will think data covered by that hypothesis are in the language - in addition to the data they encountered.

They will not think that data that are in the more-general hypothesis are in the language.

Choosing generalizations: the more general hypothesis

If children think the more-general hypothesis is correct, they will think data covered by that hypothesis are in the language - in addition to the data they encountered and the data in the less-general hypothesis.


Potential child responses when multiple generalizations are possible

less-general

more-general

Reality check

What do these correspond to in a real language learning scenario?

 Data example: Simple yes/no questions in English


"Is the dwarf laughing?"

"Can the goblin king sing?"

"Will Sarah solve the Labyrinth?"

Reality check

What do these correspond to in a real language learning scenario?




less-general hypothesis example:
Some complex grammatical yes-no questions

"Can the girl who ate the peach and forgot everything save her brother?"

"Will the dwarf who deserted Sarah help her reach the castle?"

Reality check

What do these correspond to in a real language learning scenario?

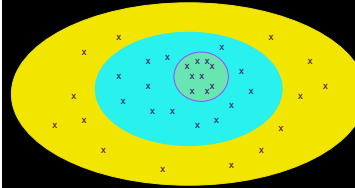

more-general hypothesis example:
Ungrammatical complex yes-no questions

"Did the girl who eat the peach and forgot everything can save her brother?"

"Did the dwarf who desert Sarah will help her reach the castle?"

Experimental Study: Gerken (2006)

How can we tell what generalizations children actually make? Let's try an artificial language learning study.

Children will be trained on data from an artificial language. This language will consist of words that follow a certain pattern.

The child's job: determine what the pattern is that allows a word to be part of the artificial language.

Artificial language: AAB/ABA pattern

Marcus et al. (1999) found that very young infants will notice that words made up of 3 syllables follow a pattern that can be represented as AAB or ABA.

Example: A syllables = le, wi B syllables = di, je

AAB language words: leledi, leleje, wiwidi, wijiwe

ABA language words: ledile, lejele, widiwi, wijewi

Artificial language: AAB/ABA pattern

Gerken (2006) decided to test what kind of generalization children would make, if they were given particular kinds of data from this same artificial language.

Words in the AAB pattern artificial language.

	di	je	li	we
le	leledi	leleje	leleli	lelewe
wi	wiwidi	wiwije	wiwili	wiwiwe
ji	jjjidi	jjjije	jjjili	jjjiwe
de	dededi	dedeje	dedeli	dedewe

What if children were only trained on a certain subset of the words in the language?

Words in the AAB pattern artificial language.

	di	je	li	we
le	leledi	leleje	leleli	lelewe
wi	wiwidi	wiwije	wiwili	wiwiwe
ji	jjjidi	jjjije	jjjili	jjjiwe
de	dededi	dedeje	dedeli	dedewe

(Experimental Condition) Training on four word types: leledi, wiwidi, jjjidi, dededi

This data is consistent with a **less-general pattern (AA_{di})** as well as the more-general pattern of the language (**AAB**)

Question: If children are given this subset of the data that is compatible with both generalizations, which generalization will they make (AA_{di} or AAB)?

(Experimental Condition) Training on four word types: leledi, wiwidi, jjjidi, dededi

This data is consistent with a **less-general pattern (AA_{di})** as well as the **more-general pattern** of the language (**AAB**)

Words in the AAB pattern artificial language.

	di	je	li	we
le	leledi	leleje	leleli	lelewe
wi	wiwidi	wiwije	wiwili	wiwiwe
ji	jijidi	jijije	jijili	jijiwe
de	dededi	dedeje	dedeli	dedewe

(Control Condition) Training on four word types: leledi, wiwije, jijili, dedewe

This data is only consistent with the **more-general pattern** of the language (AAB), and not the less-general pattern (AAdi)

This control condition is used to see what children's behavior is when the data are only consistent with one of the generalizations (the more general AAB one).

If children fail to make the generalization in the control condition, then the results in the experimental condition will not be informative. (Perhaps the task was too hard for children.)

(Control Condition) Training on four word types: leledi, wiwije, jijili, dedewe

This data is only consistent with the **more-general pattern** of the language (AAB), and not the less-general pattern (AAdi)

Experiment 1

Task type: Head Turn Preference Procedure

Test: leledi...wiwidi...jijidi...dededi

Control: leledi...wiwije...jijili...dedewe

Children:
9 month olds



Stimuli: 2 minutes of artificial language words.

Test condition words: AAB pattern words using syllables the children had never encountered before in the language. Ex: kokoba (novel syllables: ko, ba)

Experiment 1 Predictions

Control: leledi...wiwije...jijili...dedewe

If children learn the **more-general pattern** (AAB), they will prefer to listen to an **AAB pattern word** - even if it doesn't end in **di**, like kokoba, over a word that does not follow the **AAB** pattern, like kobako.



Experiment 1 Predictions

Experimental: leledi...wividi...jjjidi...dededi

If children **learn the more-general pattern (AAB)**, they will prefer to listen to an **AAB pattern word** - even if it doesn't end in **di**, like **kokoba**, over a word that does not follow the **AAB** pattern, like **kobako**.



If children **do not learn the more-general pattern (AAB)**, they will not prefer to listen to an **AAB pattern word that does not end in di**, like **kokoba**, over a word that does not follow the **AAB** pattern, like **kobako**.

Experiment 1 Results

Control: leledi...wijiwe...jjjili...dedewe

Children listened longer on average to test items consistent with the **AAB** pattern (like **kokoba**) [13.51 sec], as opposed to items inconsistent with it (like **kobako**) [10.14].

Implication: They can notice the **AAB** pattern and make the generalization from this artificial language data.

Experimental: leledi...wividi...jjjidi...dededi

Experiment 1 Results

Control: leledi...wijiwe...jjjili...dedewe

They can notice the **AAB** pattern and make the generalization from this artificial language data.

Experimental: leledi...wividi...jjjidi...dededi

Children did not listen longer on average to test items consistent with the **AAB** pattern (like **kokoba**) [10.74 sec], as opposed to items inconsistent with it (like **kobako**) [10.18].

Implication: They do not make the more-general generalization (**AAB**).

Experiment 1 Results

Control: leledi...wijiwe...jjjili...dedewe

They can notice the **AAB** pattern and make the generalization from this artificial language data.

Experimental: leledi...wividi...jjjidi...dededi

They do not make the more-general generalization (**AAB**) from this data.

Question: Do they make the less-general generalization (**AA*di***), or do they just fail completely to make a generalization?

Experiment 2

Task type: Head Turn Preference Procedure

Experimental: leledi...wiwidi...jjjidi...dededi

Children:
9 month olds



Stimuli: 2 minutes of artificial language words.

Test condition words: novel AAdi pattern words using syllables the children had never encountered before in the language. Ex: kokodi (novel syllable: ko)

Experiment 2 Predictions

Experimental: leledi...wiwidi...jjjidi...dededi

If children learn the less-general pattern (AAdi), they will prefer to listen to an AAdi pattern word, like kokodi, over a word that does not follow the AAdi pattern, like kodiko.



If children don't learn any pattern, they will not prefer to listen to an AAdi pattern word, like kokodi, over a word that does not follow the AAdi pattern, like kodiko.

Experiment 2 Results


Experimental: leledi...wiwidi...jjjidi...dededi

Children prefer to listen to novel words that follow the less-general AAdi pattern, like kokodi [9.33 sec], over novel words that do not follow the AAdi pattern, like kodiko [6.25 sec].

Implication: They make the less-general generalization (AAdi) from this data. It is not the case that they fail to make any generalization at all.

Gerken (2006) Results

When children are given data that is compatible with a less-general and a more-general generalization, they prefer to be conservative and make the less-general generalization.

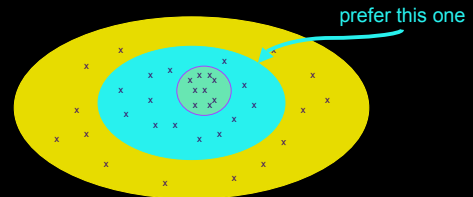


Gerken (2006) Results

When children are given data that is compatible with a **less-general** and a **more-general** generalization, they prefer to be **conservative** and make the less-general generalization.

Specifically for the artificial language study conducted, children prefer not to make unnecessary abstractions about the data. They prefer the **AAdi** pattern over a more abstract **AAB** pattern when the **AAdi** pattern fits the data they have encountered.

Why would a preference for the less-general generalization be a sensible preference to have?

What if children preferred this one...

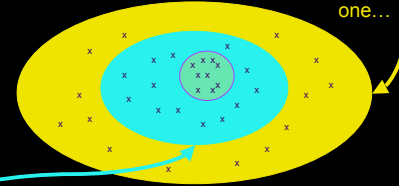


...but the language really was this one?

Problem: There is no data children could receive that would clue them in that the less-general generalization is right. All data compatible with the less-general one are compatible with the more-general one.

Why would a preference for the less-general generalization be a sensible preference to have?

What if children preferred this one...

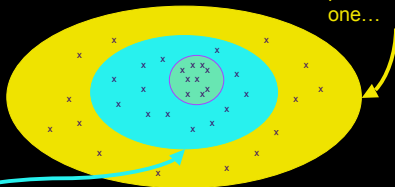

...but the language really was this one?

This is known as the **Subset Problem** for language learning.

Solutions to the Subset Problem


Subset Principle (Wexler & Manzini 1987): In order to learn correctly in this scenario where one generalization covers a subset of the data another generalization covers, children should prefer the less-general generalization.

This is a learning strategy that can result very naturally from a type of probabilistic learner known as a Bayesian learner, which uses the **Size Principle** (Tenenbaum & Griffiths 2001).

Size Principle Logic

Has to do with children's expectation of the data points that they should encounter in the input


If the **more-general generalization (AAB)** is correct, the child should encounter **some data** that can only be accounted for by the more-general generalization (like **memewe** or **nanaje**). These data would be **incompatible** with the **less-general generalization (AAdi)**.

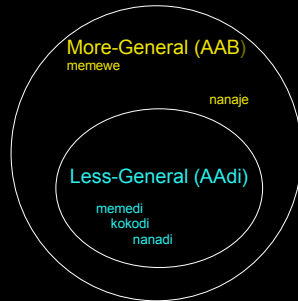

Size Principle Logic

Has to do with children's expectation of the data points that they should encounter in the input

If the child keeps **not encountering data compatible only with the more-general generalization**, the **less-general generalization** becomes more and more likely to be the generalization responsible for the language data encountered.



Summary

Children will often be faced with multiple generalizations that are compatible with the language data they encounter. In order to learn their native language, they must choose the correct generalizations.

Experimental research on artificial languages suggests that children prefer the more conservative generalization compatible with the data they encounter.

This learning strategy is one that a probabilistic learner may be able to take advantage of quite naturally. So, if children are probabilistic learners of this kind, they may automatically follow this conservative generalization strategy.

Questions?

